

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

B23D 53/02, 53/08, 55/04

A1

(11) International Publication Number:

WO 98/39126

(43) International Publication Date: 11 September 1998 (11.09.98)

(21) International Application Number: PCT/GB98/00648

(22) International Filing Date: 2 March 1998 (02.03.98)

(30) Priority Data:

9704414.3

4 March 1997 (04.03.97)

GB

(71) Applicant (for all designated States except US): EDMET INTERNATIONAL LIMITED [GB/GB]; 52-54 Oswald Road, Scunthorpe, North Lincolnshire DN15 7PQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): * EDDY, Edwin, James, DuMorris [GB/GB]; Aspen Farm, Holme, Bottesford, Nr Scunthorpe, Lincolnshire DN16 1DQ (GB). * EDDY, Shay, Vincent [GB/GB]; 2 Lydford Court, Off Bridgewater Road, Scunthorpe, North Lincolnshire DN17 1XR (GB). * EDDY, Delville, Edwin [GB/GB]; 25 Crosby Avenue, Scunthorpe, North Lincolnshire DN15 8PA (GB). EDDY, Paul, Anthony [GB/GB]; 14 Mere Crescent, Scunthorpe, North Lincolnshire DN16 1UQ (GB).

(74) Agent: ELSWORTH, Dominic, Stephen; Loven and Co., Quantum House, 30 Tentercroft Street, Lincoln LN5 7DB (GB).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

With amended claims.

(54) Title: DEVICE FOR COLD CUTTING ELONGATE MEMBERS ALONG A LONGITUDINAL AXIS

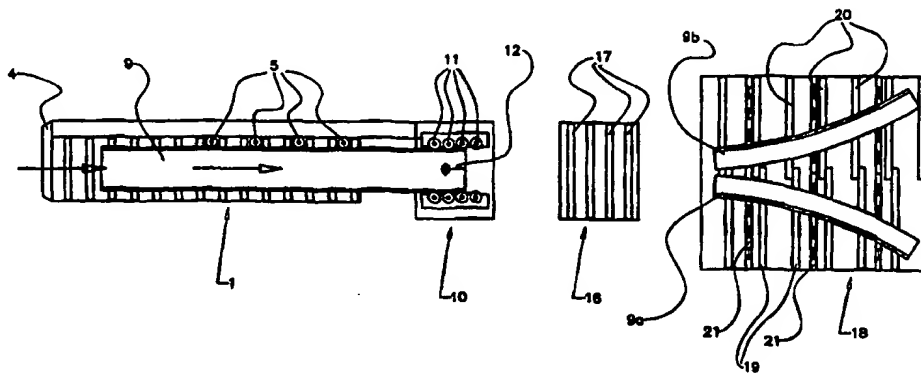

(57) Abstract

A cold separation device for separating an elongate member (9) along its length, the device comprising a separation unit (12) comprising a driven blade (26), support means (1, 16, 18, 27, 28, 29, 30) to support the elongate member upstream and downstream and in the vicinity of the separation unit (12), and a feeder means (4) to feed the said elongate member towards and through the separation unit (12).